


Three views of a white plastic terminal block enclosure. The left view shows the front with the cover removed, revealing a row of 12 terminals. The middle view shows the back with the cover removed, revealing a row of 12 terminals. The right view shows the closed enclosure.

Model and size		제품모델 Product model					
Width×Length×Height×Hole (Unit : mm커버포함)	Width×Length×Height×Hole (Unit : inch)	ABS 회색 (Grey)		ABS 청회색 (Grayish blue)		PC/ABS 회색 (Grey)	
		불투명 (Opaque)	투명 (Transparent)	불투명 (Opaque)	투명 (Transparent)	불투명 (Opaque)	투명 (Transparent)
100 × 185 × 70	3.94 × 7.28 × 2.76	BC-AG-15P	BC-AG-15P(T)	BC-AB-15P	BC-AB-15P(T)	BC-PG-15P	BC-PG-15P(T)
방수, 방진 보호등급	IP 66/67			총 격 테 스트		IK 07/08	
온 도 영 역	ABS : -40~+85 PC : -40~+120						
난 연 성	PC/ABS : V-O~5VA ABS : 94-V-O						
절연정격전압	400V			총통정격전압		4KV	
절격전류용량	0.75mm sq. - 1.5mm sq.						

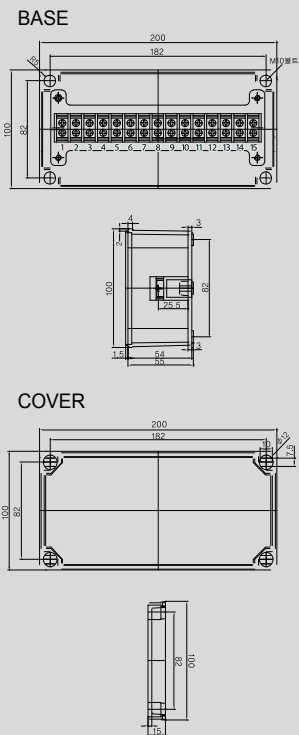

The image displays three views of a white plastic terminal block enclosure. The leftmost view shows the front of the enclosure with its lid open, revealing a blue terminal block with multiple pins. The middle view shows the back of the enclosure with its lid open, revealing a metal mounting plate with four screws. The rightmost view shows the top of the enclosure with its lid closed, secured by four screws.

Model and size		제품모델 Product model					
Width×Length× Height×Hole (Unit : mm커버포함)	Width×Length ×Height×Hole (Unit : inch)	ABS 회색 (Grey)		ABS 청회색 (Grayish blue)		PC/ABS 회색 (Grey)	
		불투명 (Opaque)	투명 (Transparent)	불투명 (Opaque)	투명 (Transparent)	불투명 (Opaque)	투명 (Transparent)
100 × 185 × 70	3.94 × 7.28 × 2.76	BC-AG-15P-T	BC-AG-15P-T(T)	BC-AB-15P-T	BC-AB-15P-T(T)	BC-PG-15P-T	BC-PG-15P-T(T)
방수,방진 보호등급	IP 66/67			총 격 테 스 트		IK 07/08	
온 도 영 역	ABS : -40~+85 PC : -40~+120						
난 연 성	PC/ABS : V-O~5VA ABS : 94-V-O						
절연정격전압	400V			총동정격전압		4KV	
정격전류용량	0.75mm sq. - 1.5mm sq.						

